





July 12, 2022

William F. Skerjanc

TRISO Fuel Performance Modeling with PARFUME

Outline

- Introduction
- Overview of TRISO Fuel Performance Modeling
- TRISO fuel performance code PARFUME
- PARFUME application to support the AGR program
- Current Status and Future Work

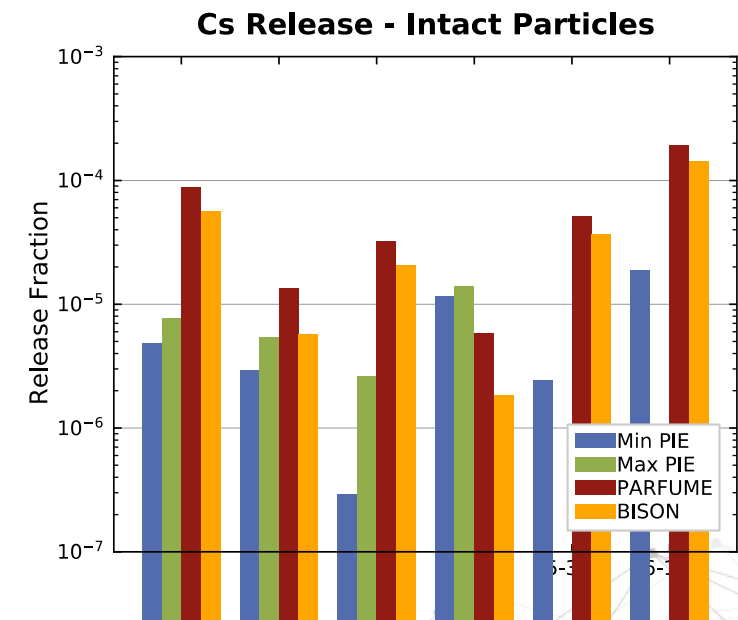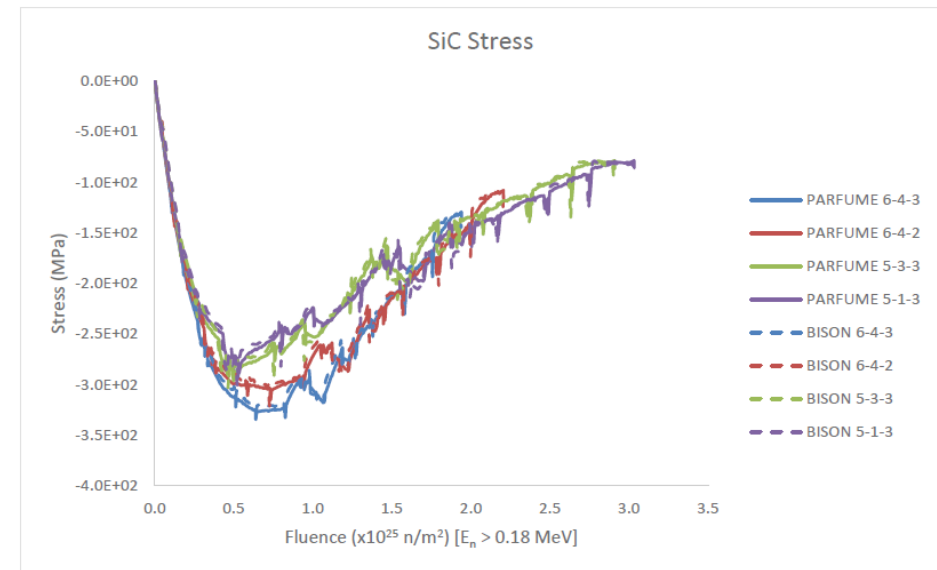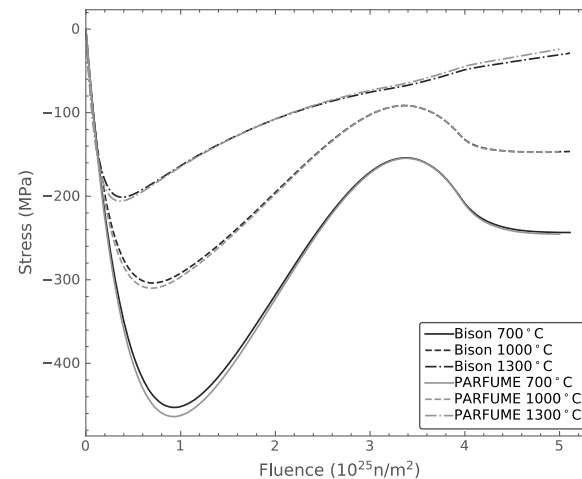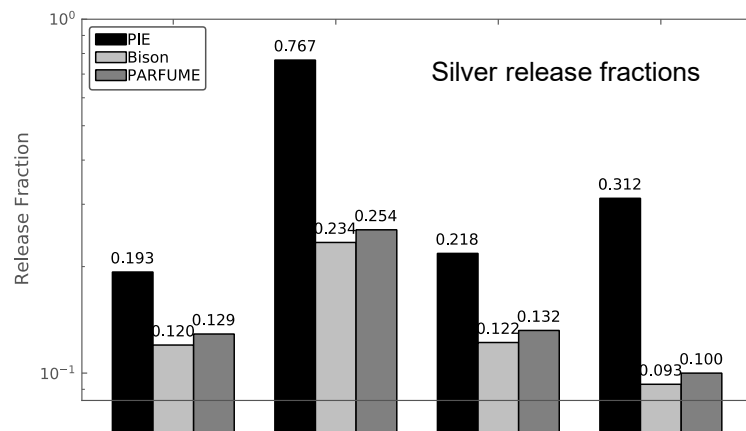

Introduction

- Why fuel performance modeling?

- Addresses:



- Fuel particle failure
 - Structural
 - Thermal
 - Chemical
 - Fission product transport
 - fuel-compact matrix
 - fuel-element graphite

- Assists in the:

- Fuel design
 - Fabrication
 - Optimization
 - Experiment design
 - Fuel behavior



- Objective

- Enhance the understanding of fuel behavior and fission product transport
 - Improve the fuel performance and fission product models
 - Develop advanced models using new methods
 - Provide validated tools to industry

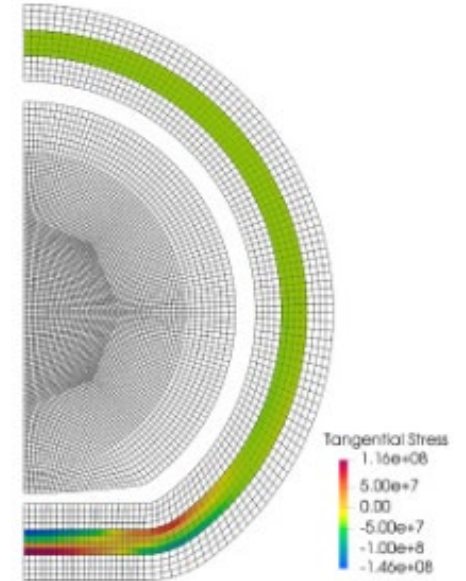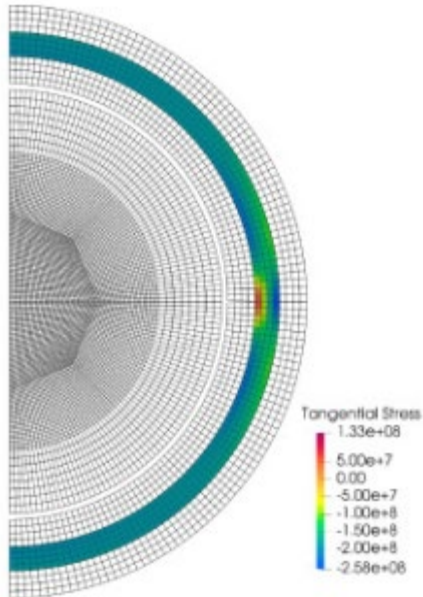


TRISO Fuel Performance Modeling

- Basic fuel particle behavior
 - Several physical phenomena influence the behavior of the particles including fission gas production and irradiation effects
- Applications of fuel performance modeling
 - Optimize particle design
 - Plan irradiation experiments
 - Identify tolerances of specifications
 - Estimate reactor fuel performance
- Existing TRISO fuel performance codes
 - PARFUME: Spherical symmetry to reduce the particle response to a 1D model and uses closed-form analytical solution for the stress-strain-displacement relationship.
 - Bison: uses finite element method to solve the basic thermo-mechanics and mass diffusion equations. This avoids the simplifications necessary for a closed form solution.

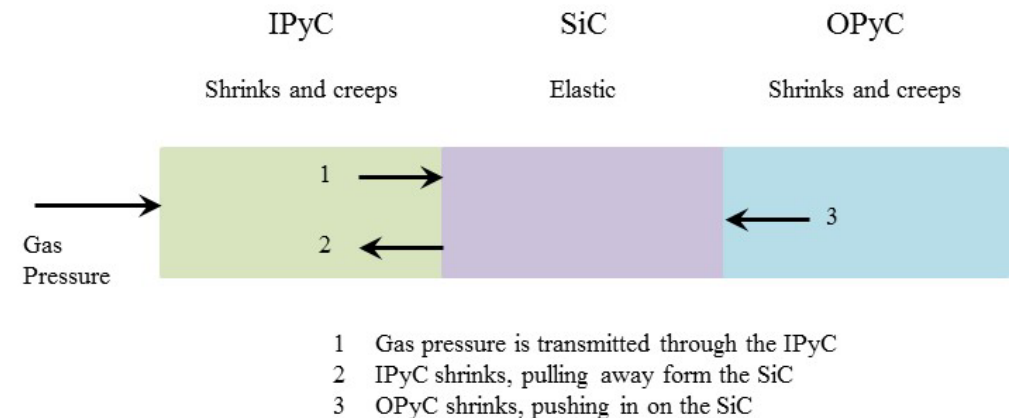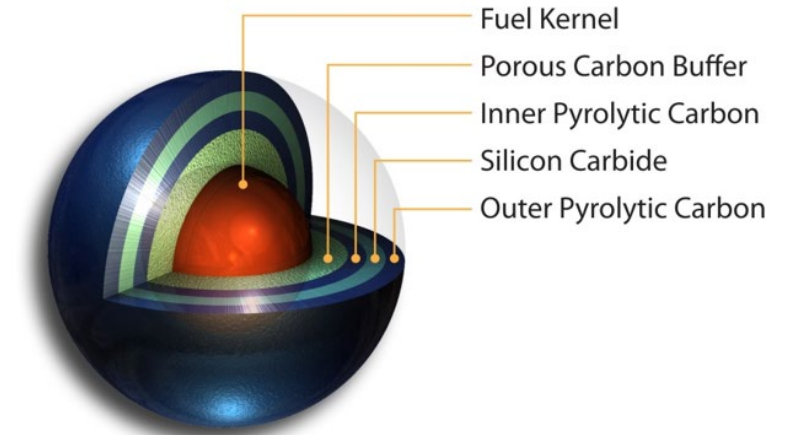


TRISO Failure Modes

- Mechanical
 - Pressure vessel failure
 - Cracking of the IPyC layer
 - Partial debonding of IPyC/SiC and Buffer/IPyC
 - Pressure vessel failure of an aspherical particle
- Thermochemical
 - Amoeba effect
 - Palladium attack of the SiC layer
 - Corrosion of SiC by CO
 - SiC thermal decomposition

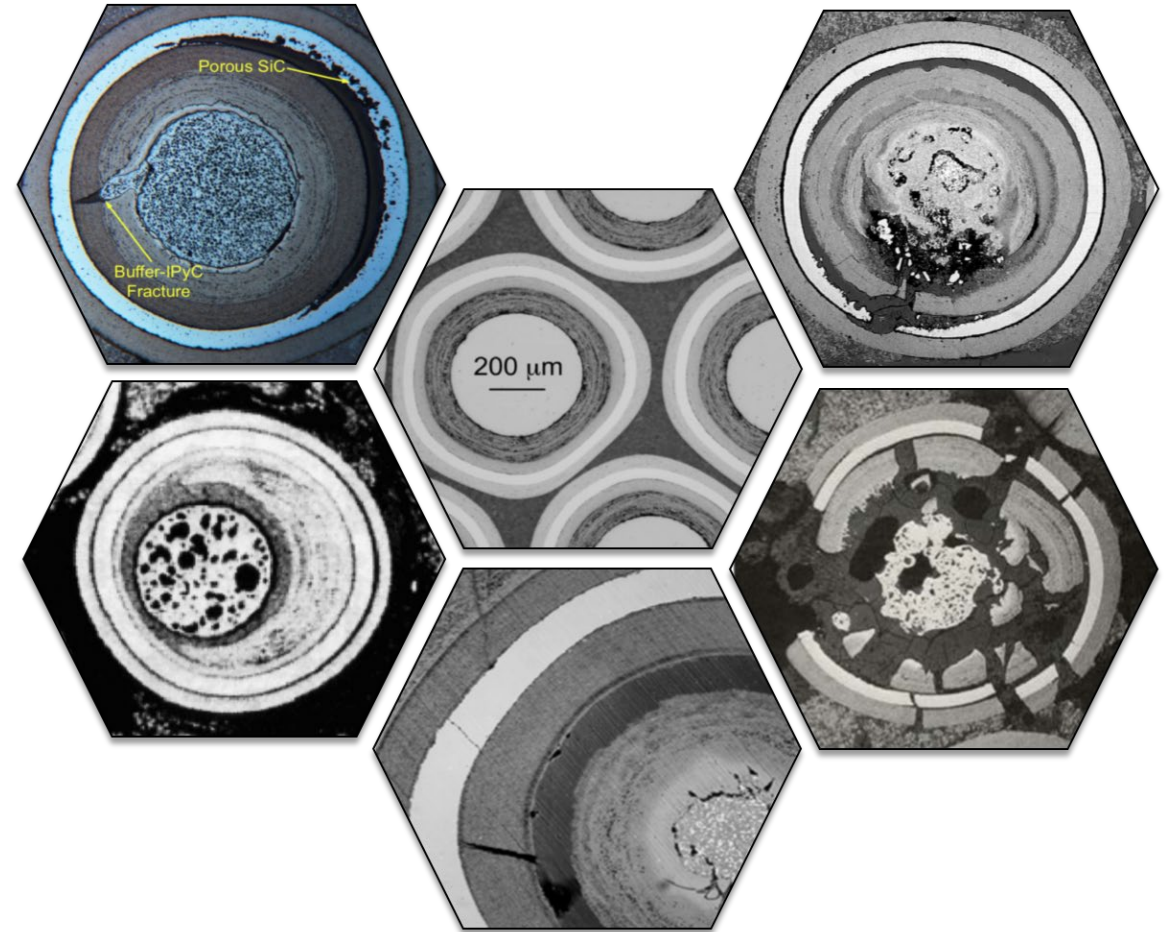

PARFUME – PARticle Fuel ModEl

- Fuel Performance Code PARFUME
 - An integrated mechanistic code that evaluates the thermal, mechanical, and physico-chemical behavior of TRISO fuel particles
 - Capable of evaluating fuel particle failure under both irradiation and accident conditions
 - Tracks the probability of fuel particle failure given the particle-to-particle statistical variations in physical dimensions and material properties.

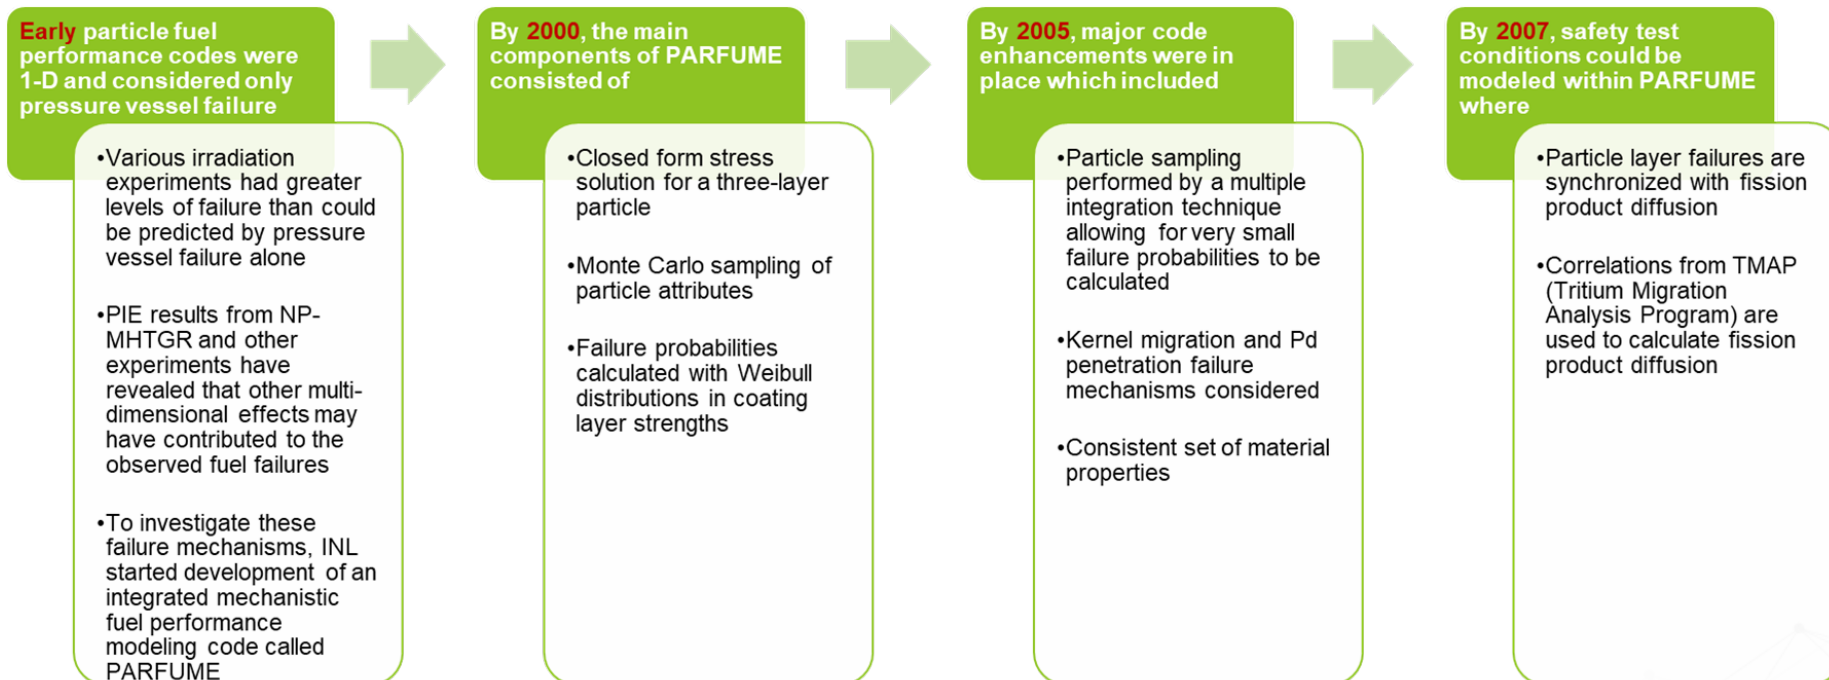

Fuel Performance Modeling to Support the AGR Experiments

AGR-1

- Pre-irradiation prediction (**EDF-5741**)
- Fission product release comparison to in-pile PIE (**INL/EXT-14-31975**)
- Fission product release comparison to safety test PIE (**INL/EXT-14-31976**)

AGR-2

- Pre-irradiation prediction (**ECAR-1020**)
- Safety test predictions (**INL/EXT-14-33082**)
- Fission product release comparison to in-pile and safety test PIE (**INL/EXT-20-59448**)
- Comparison between PARFUME and Bison (**INL/EXT-20-59890**)

AGR-3/4


- Pre-irradiation prediction (**INL/EXT-16-38280**)
- Irradiation as-run predictions (**INL/EXT-21-65160 Bison**)
- Fission product release comparison to in-pile and safety test PIE (**FY-22 Bison**)

AGR-5/6/7

- Pre-irradiation prediction (**INL/EXT-17-43189**)
- Fuel performance basis for fuel specification (**ECAR-2341**)
- Irradiation as-run predictions (**INL/EXT-21-64576**)
- Safety test predictions (**FY-23 PARFUME/Bison**)
- Fission product release comparison to in-pile and safety test PIE (**FY-26 PARFUME/Bison**)

Fuel Performance Modeling to Support the AGR Program



- Additional activities
 - IAEA normal and accident benchmarks (**ECAR-728**)
 - Assessment of material properties for TRISO fuel particles (**INL/EXT-18-44631**)
 - Kernel/buffer volume fraction margin (**FY-23**)
- Modeling improvements
 - Fission product transport model (**FY-23 Bison**)
 - Thermomechanical buffer layer modeling (**TBD Bison**)
 - Pyrocarbon creep rate (**TBD PARFUME/Bison**)

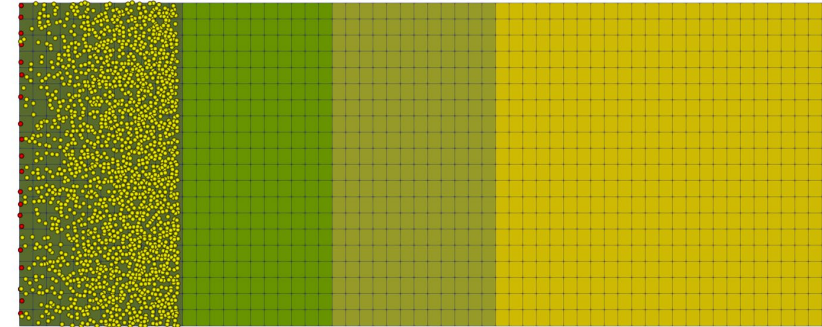

AGR-5/6/7 predicted fuel particle failure using PARFUME.

Capsule	5	4
Average compact temperature (°C)	741	839
Average compact predicted failure fraction	2.60E-04	1.14E-04
Total number of TRISO particles	81432	52728
Predicted number of TRISO particle failures	21	6
Observed number of TRISO particle failures ¹	0	0

1. Per AGR-5/6/7 irradiation as-run report based on the data currently available.

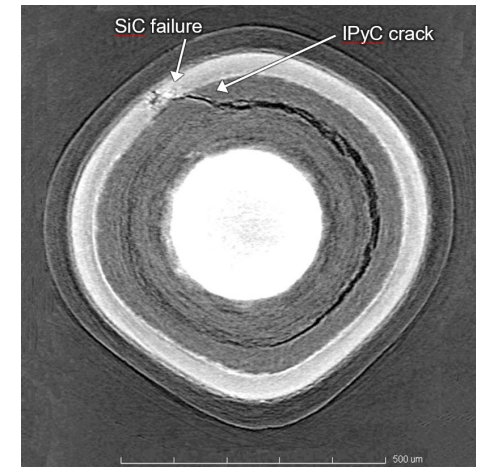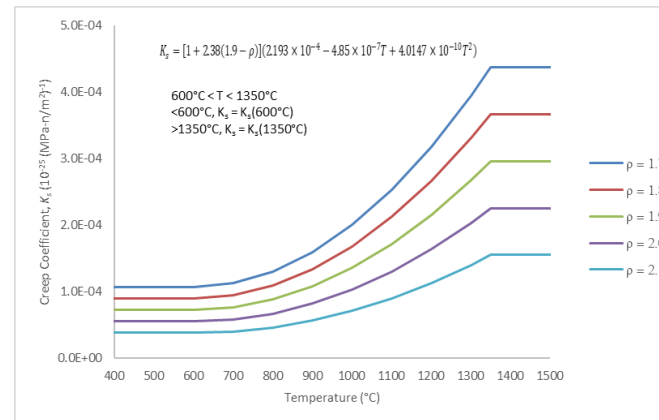



Questions?